




**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

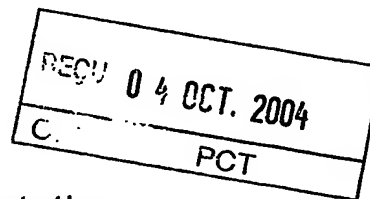

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

04077184.2



Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 04077184.2
Demande no:

Anmeldetag:
Date of filing: 29.07.04
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

UNILEVER N.V.
Weena 455
3013 AL Rotterdam
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Container lid

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

B65D/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PL PT RO SE SI SK TR LI

29. 07. 2004

1

(100)

Container lid**Description****5 Field of the invention**

The invention relates to a thermoformed plastic container lid comprising a substantially sheet like lid body having a depending skirt (1) extending around the full periphery of the lid body, the skirt (1) being suitable for engagement with the peripheral portion of a plastic open top container, comprising a lid rim (2) in a position near the periphery of the lid body, which divides the lid body in a centrally located mirror (3) and an outer part (4) on the other side of the lid rim (2). Such a container lid is also known as a two-step container lid (see figure 1), as opposed to a one-step container lid (see figure 2), in which the rim (2') engages with the container rim.

20

Background to the invention

A two-step container lid as described in the preamble of claim 1 is known from DE29910076U1. A two-step container lid may be used in situations where the container is covered with a cover foil, whereas the one-step lid may not. The reason is that the mirror of the two-step lid is at the same level as the top rim of the container and the foil. A one-step container lid cannot be used in combination with a foil at the level of the container rim, since the mirror of the one-step lid will be at a level below the level of the foil.

A disadvantage of the known two-step container is that, after initial opening, when the user wants to re-close the container, the top rim of the container may fall
5 into the recess (8) of the lid rim (2), after which the container cannot be closed. This re-closing problem especially occurs, when the user wants to re-close the container using one hand, and presses the lid on the container from one side to the other.

10

It is therefore an object of the invention to avoid the above re-closing problem.

Statement of the invention

15

This object is attained according to the invention in that the lid rim (2) comprises one or more bridges (5) connecting the mirror (3) and the outer part (4).

20

The bridge or bridges (5) will cause the lid to slide over the container rim until the container rim is caught by the skirt (1), it is no longer possible that the container rim enters into the recess (8) of the lid rim (2).

25

An additional advantage of the invention is that the bridges (5) reduce or even avoid the problem of nesting of the lids when stacked and put under pressure, e.g. in a production line. Conventional two-step lids, may when
30 stacked and put under pressure nest, because the lid rim (6) of a lower lid may be pushed into the recess (8) of the lid rim (2) of a lid higher in the stack. This

problem is also solved by the provision of bridges (5).
The tendency to nest is herein determined by measuring
the pressure needed to compress a stack of lids, and the
pressure needed is herein called the stack compression
5 resistance (expressed in N/m²).

Detailed description of the invention

10 The container and lid according to the invention may be
made by the technologies known in the art, from
materials known in the art.

15 The lid is made by thermoforming. In thermoforming a
plastic sheet softened by heat is formed either into or
around a mould. This forming step may be supported by
vacuum, air pressure, and material distribution may be
improved by plug assistance. There are three main groups
of thermoforming: vacuum forming, pressure forming and
matched mould forming.

20 The material of the lid and container may be any
material known for this use. Examples of possible
materials are HDPE (high density polyethylene), LDPE
(Low density polyethylene), PP (polypropylene),
25 PET (Polyester Terephthalate), PVC (Polyvinylchloride),
OPVC (oriented PVC), PC (Polycarbonate), EVOH
(Ethylenevinylalcohol) and multilayer materials of two
or more of these polymers.

30 The shape of the container lid may be any shape, for
example round, rounded rectangular, oval or square.

The skirt (1) is preferably provided with indent features (7) see figure 4. These indent features (7) fix the lid on the container when closed.

- 5 In a preferred embodiment, the one or more bridges (5) are in the same plane as the mirror (3). In another preferred embodiment the lid rim (2) comprises four or more bridges (5). Four bridges (5) may already be effective if positioned on each of the sides of a square
10 or rectangular container lid. Preferably the container lid comprising six or more bridges (5) and preferably the bridges (5) are distributed evenly around the periphery of the lid.
- 15 Another preferred embodiment of the invention is shown in figure 5, which shows the cross-section of the two preferred lids at the place of a bridge. In this preferred embodiment, the bridge is a partial bridge consisting of two bridge parts (9,10), each bridge part
20 (9,10) being an indentation of a side wall of the lid rim (2). Preferably, the indentation is formed by placing part of the side wall at a negative angle, compared to the side wall at a place where there is no bridge, as shown in figure 5. The advantage of this
25 construction is that it is no longer possible that the container rim enters into the recess (8) of the lid rim (2) and that the stack compression resistance is very high, because a load on the stack is effectively transferred to lower lids, through the bridge parts
30 (9,10).

The number of bridges may be easily determined by the skilled person taking into consideration the size and shape of the container lid. A large container lid will need more bridges than a small container lid.

5

In another preferred embodiment the container lid comprises an uneven number of bridges (5) evenly distributed around the periphery of the lid. This improves the flexing strength of the lid, compared to the same lid with an even number of bridges distributed evenly around the periphery of the lid. Preferably the width of the bridges (5) is 3 mm or more. The width should be such that the bridge does not break when a pressure commonly used to close the container is applied. The features of the preferred embodiments described above may be applied as such or in combination with each other.

10

15

The lid and container may be used for packaging consumer goods, such as for instance foods, such as for instance margarines or spreads.

20

Description of the drawings

25

Figure 1: Cross-section of detail of two stacked one-step container lids

Figure 2: Cross-section of detail of two stacked two-step container lids

30

Figure 3: Top view of container lid according to the invention having eight bridges

Figure 4: Side view of conventional container lid showing skirt (1) and indent features (7), as may also be applied on the lid according to the invention

5 Figure 5: Cross-section of detail of a preferred embodiment, showing partial bridges (9,10)

29. 07. 2004

(100)

Claims

1. Thermoformed plastic container lid comprising a substantially sheet like lid body having a depending skirt (1) extending around the full periphery of the lid body, the skirt (1) being suitable for engagement with the peripheral portion of a plastic open top container, comprising a lid rim (2) in a position near the periphery of the lid body, which divides the lid body in a centrally located mirror (3) and an outer part (4) on the other side of the lid rim (2), characterised in that the lid rim (2) comprises one or more bridges (5) connecting the mirror (3) and the outer part (4).
2. Container lid according to claim 1, wherein the one or more bridges (5) are in the same plane as the mirror (3).
3. Container lid according to claim 1 or 2, wherein the bridge is a partial bridge consisting of two bridge parts (9,10), each being an indentation of a side wall of the lid rim (2).
4. Container lid according to claim 3, wherein the indentation is formed by placing part of the side wall at a negative angle, compared to the side wall at a place where there is no bridge.
5. Container lid according any of claims 1-4, comprising four or more bridges (5).

6. Container lid according to claim 5, comprising six or more bridges (5).
7. Container lid according to any of claims 1-6, wherein the bridges (5) are distributed evenly around the periphery of the lid.
8. Container lid according to any of claims 1-7, comprising an uneven number of bridges (5).
9. Container lid according to any of claims 1-8, wherein the width of the bridges (5) is 3 mm or more.

29.07.2004

ABSTRACT

(100)

Thermoformed plastic container lid comprising a substantially sheet like lid body having a depending skirt (1) extending around the full periphery of the lid body, the skirt (1) being suitable for engagement with the peripheral portion of a plastic open top container, comprising a lid rim (2) in a position near the periphery of the lid body, which divides the lid body in a centrally located mirror (3) and an outer part (4) on the other side of the lid rim (2), wherein the lid rim (2) comprises one or more bridges (5) connecting the mirror (3) and the outer part (4).

Figure 1/5

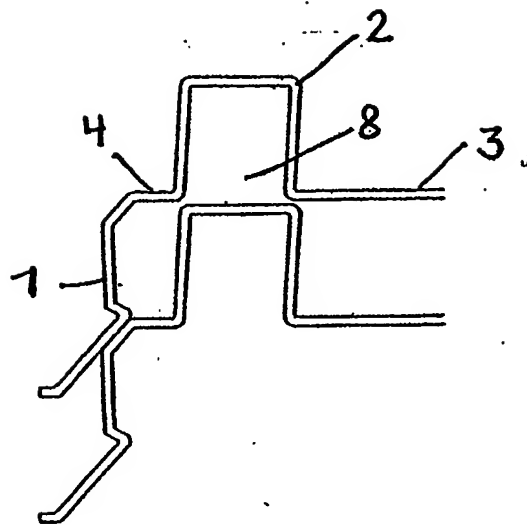


Figure 2/5

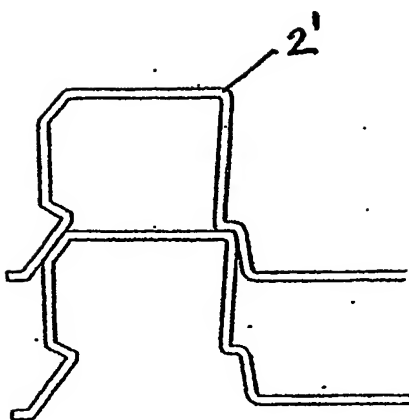


Figure 3/5

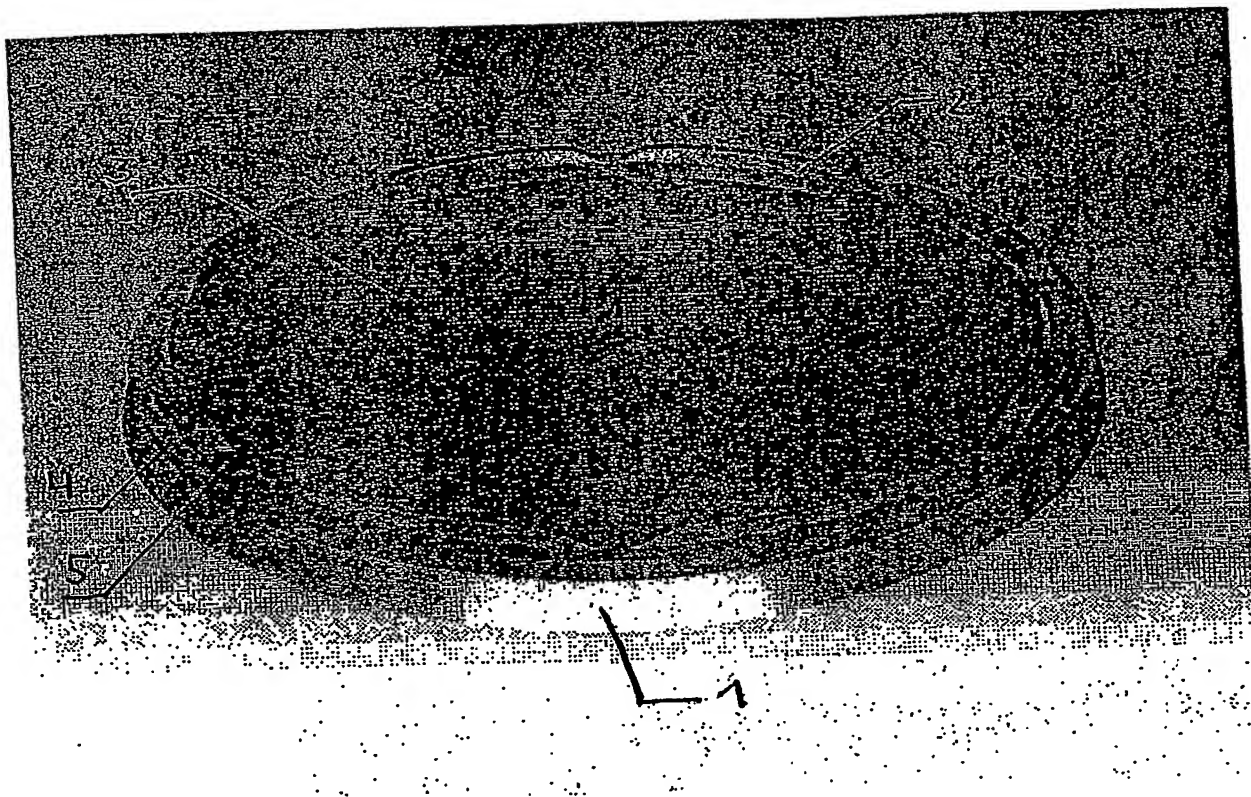


Figure 4/5


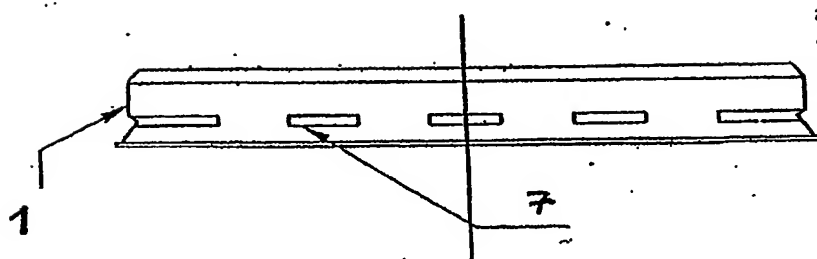


Figure 5/5

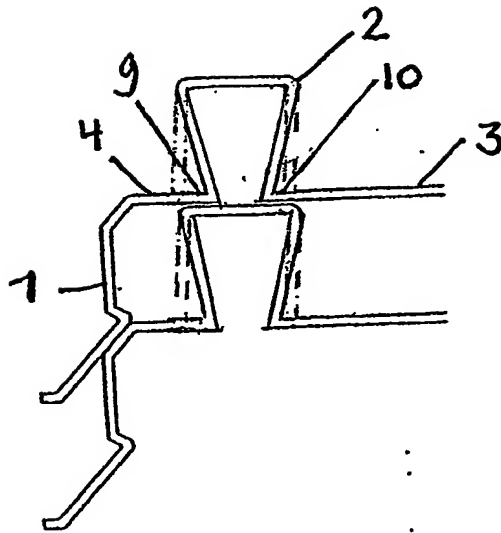

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.